

**C.I.P.****8 x 60 S**

Pays d'origine: DE

TAB.


I

Date

84-06-14

Révision

06-09-19

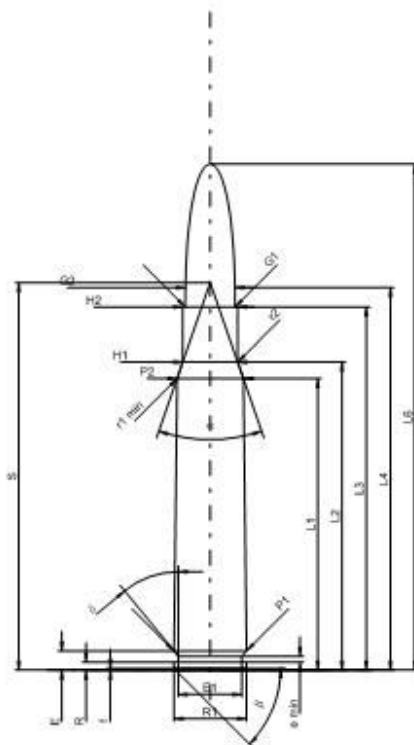**CARTOUCHE MAXI****Longueurs**

|                  |   |       |       |
|------------------|---|-------|-------|
| L1 <sup>1)</sup> | = | 48.20 | -0.20 |
| L2 <sup>1)</sup> | = | 50.90 | -0.20 |
| L3 <sup>1)</sup> | = | 60.00 |       |
| L4               | = | 63.20 |       |
| L5               | = |       |       |
| L6               | = | 83.60 |       |

**Culot**

|       |   |           |  |
|-------|---|-----------|--|
| R     | = | 1.30      |  |
| R1    | = | 11.95     |  |
| R3    | = |           |  |
| E     | = | 3.20      |  |
| E1    | = | 10.50     |  |
| e min | = | 1.00      |  |
| δ     | = | 39°25'48" |  |
| f     | = | 0.30      |  |
| β     | = | 45°       |  |

**Chambre à poudre**

|                  |   |       |       |
|------------------|---|-------|-------|
| P1               | = | 11.98 |       |
| P2 <sup>1)</sup> | = | 10.95 | -0.20 |

**Cône de raccordement**

|        |   |           |  |
|--------|---|-----------|--|
| α      | = | 38°12'06" |  |
| S      | = | 64.01     |  |
| r1 min | = | 0.50      |  |
| r2     | = | 0.50      |  |

**Collet**

|                  |   |      |  |
|------------------|---|------|--|
| H1 <sup>*</sup>  | = | 9.08 |  |
| H2 <sup>1)</sup> | = | 9.08 |  |

**Projectile**

|                    |   |       |  |
|--------------------|---|-------|--|
| G1 <sup>1)</sup>   | = | 8.22  |  |
| G2                 | = | 8.18  |  |
| F                  | = |       |  |
| L3+G <sup>1)</sup> | = | 94.00 |  |

**Pressions (Énergies)****Méthode transducteur**

|      |   |            |  |
|------|---|------------|--|
| Pmax | = | 4050 bar   |  |
| PK   | = | 4658 bar   |  |
| PE   | = | 5060 bar   |  |
| M    | = | 25.00      |  |
| EE   | = | 4285 Joule |  |

**Autres indications**

|                  |   |      |  |
|------------------|---|------|--|
| Fe <sup>1)</sup> | = | 0.10 |  |
| delta L          | = |      |  |

**CHAMBRE MINI****Longueurs**

|                  |   |       |  |
|------------------|---|-------|--|
| L1 <sup>*</sup>  | = | 48.16 |  |
| L2 <sup>*</sup>  | = | 50.85 |  |
| L3 <sup>1)</sup> | = | 60.30 |  |

**Cuvette**

|    |   |       |  |
|----|---|-------|--|
| R  | = | 1.30  |  |
| R1 | = | 12.00 |  |
| R2 | = |       |  |
| R3 | = |       |  |
| r  | = |       |  |

**Chambre à poudre**

|                  |   |       |  |
|------------------|---|-------|--|
| E                | = | 3.20  |  |
| P1               | = | 12.01 |  |
| P2 <sup>1)</sup> | = | 10.98 |  |

**Cône de raccordement**

|                 |   |        |  |
|-----------------|---|--------|--|
| α <sup>1)</sup> | = | 38°20' |  |
| S               | = | 63.95  |  |
| r1 max          | = | 0.50   |  |
| r2              | = | 0.50   |  |

**Collet**

|                  |   |      |  |
|------------------|---|------|--|
| H1 <sup>*</sup>  | = | 9.11 |  |
| H2 <sup>1)</sup> | = | 9.10 |  |

**Prise de rayures**


|                  |   |          |  |
|------------------|---|----------|--|
| G1 <sup>1)</sup> | = | 8.23     |  |
| G <sup>1)</sup>  | = | 34.00    |  |
| α.l              | = | 180°     |  |
| h                | = |          |  |
| s                | = |          |  |
| i <sup>1)</sup>  | = | 0°17'11" |  |
| w                | = |          |  |

**Canon**

|                 |   |      |  |
|-----------------|---|------|--|
| F <sup>1)</sup> | = | 7.89 |  |
| Z <sup>1)</sup> | = | 8.20 |  |

**Rayures**

|   |   |        |                 |
|---|---|--------|-----------------|
| b | = | 4.40   |                 |
| N | = | 4      |                 |
| u | = | 240.00 |                 |
| Q | = | 51.78  | mm <sup>2</sup> |

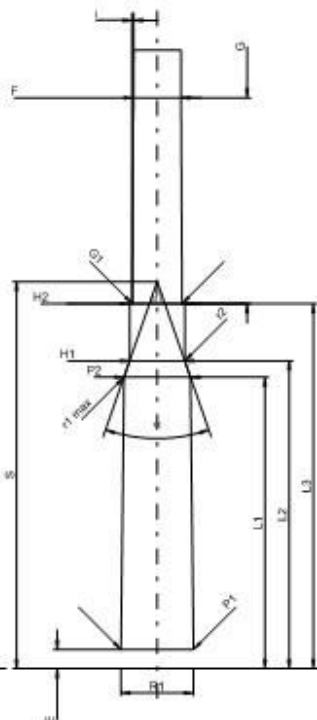

Échelle 1:1.21

Dimensions en << mm >>  
Dimensions et tolérances pour les canons  
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité  
\* Dimensions de base