

C.I.P.**35 Rem.**

TAB.

I


Date

91-02-20

Pays d'origine: US

Révision

02-05-15

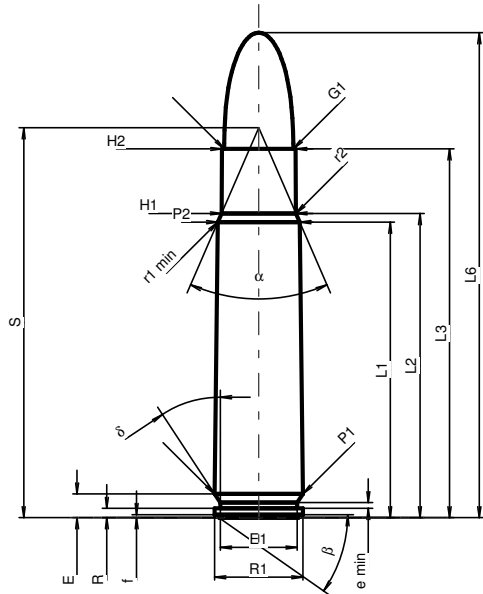**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	39.10	-0.20
L2 ¹⁾	=	40.24	-0.20
L3 ¹⁾	=	48.77	
L4	=		
L5	=		
L6	=	64.14	

Culot

R	=	1.24	
R1	=	11.68	
R3	=		
E	=	3.14	
E1	=	10.16	
e min	=	0.76	
delta	=	34°	
f	=	0.41	
beta	=	35°	

Chambre à poudre

P1	=	11.66	
P2 ¹⁾ *	=	10.82	-0.20

Cône de raccordement

alpha *	=	46°49'59"	
S *	=	51.59	
r1 min	=	0.64	
r2	=	1.27	

Collet

H1 *	=	9.83	
H2 ¹⁾	=	9.75	

Projectile

G1 ¹⁾	=	9.12	
G2	=		
F	=		
L3+G ¹⁾	=	52.02	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	2750 bar	
PK	=	3163 bar	
PE	=	3575 bar	
M	=	25.00	
EE	=	2655 Joule	

Autres indications

Fe ¹⁾³⁾	=	0.15	
delta L	=	0.13	

CHAMBRE MINI**Longueurs**

L1	=	38.91	
L2	=	40.10	
L3 ¹⁾	=	48.88	

Cuvette

R	=		
R1	=	11.78	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.14	
P1 ¹⁾	=	11.70	
P2 *	=	10.86	

Cône de raccordement

alpha ¹⁾ *	=	46°50'	
S *	=	51.45	
r1 max	=	0.64	
r2	=	1.27	

Collet

H1 *	=	9.83	
H2 ¹⁾	=	9.75	

Prise de rayures

G1 ¹⁾ *	=	9.07	
G ¹⁾	=	3.25	
alpha 1 *	=	60°	
h	=	0.59	
s	=		
i ¹⁾ *	=	2°15'32"	
w	=		

Canon

F ¹⁾ *	=	8.86	
Z ¹⁾	=	9.07	

Rayures

b	=	2.92	
N	=	7	
u	=	406.00	
Q	=	63.84	mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
3) Feuillure sur la cone de raccordement
* Dimensions de base

C.I.P.



35 Whelen

Pays d'origine: US

TAB. I

Date 94-03-01

Révision 02-05-15

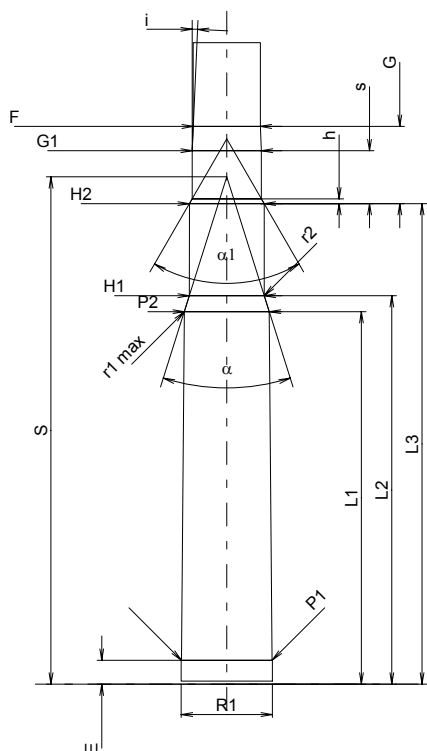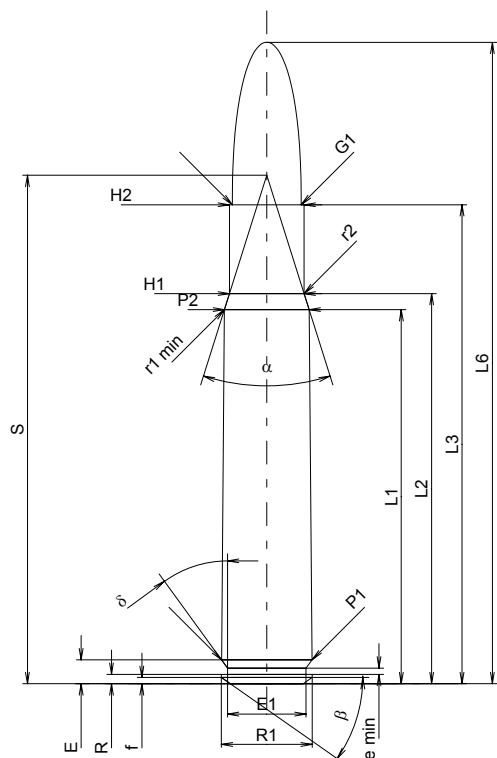

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

CARTOUCHE MAXI

Longueurs

L1 ¹⁾	=	49.48	-0.20
L2 ¹⁾	=	51.60	-0.20
L3 ¹⁾	=	63.35	
L4	=		
L5	=		
L6	=	84.84	

Culot

R	=	1.24	
R1	=	12.01	
R3	=		
E	=	3.16	
E1	=	10.39	
e min	=	0.84	
delta	=	36°	
f	=	0.83	
beta	=	35°	

Chambre à poudre

P1	=	11.96	
P2 ^{1)*}	=	11.20	-0.20

Cône de raccordement

alpha*	=	35°	
S*	=	67.24	
r1 min	=	1.27	
r2	=	2.54	

Collet

H1*	=	9.86	
H2 ¹⁾	=	9.86	

Projectile

G1 ¹⁾	=	9.12	
G2	=		
F	=		
L3+G ¹⁾	=	73.56	

Pressions (Énergies)

Méthode transducteur

Pmax	=	4000 bar	
PK	=	4600 bar	
PE	=	5000 bar	
M	=	25.00	
EE	=	4560 Joule	

Autres indications

Fe ¹⁾	=	0.10	
delta L	=		

CHAMBRE MINI

Longueurs

L1	=	49.27	
L2	=	51.37	
L3 ¹⁾	=	63.55	

Cuvette

R	=		
R1	=	12.04	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.16	
P1 ¹⁾	=	11.99	
P2*	=	11.24	

Cône de raccordement

alpha ^{1)*}	=	35°	
S*	=	67.09	
r1 max	=	1.27	
r2	=	2.54	

Collet

H1*	=	9.91	
H2 ¹⁾	=	9.88	

Prise de rayures

G1 ^{1)*}	=	9.14	
G ¹⁾	=	10.21	
alpha1*	=	60°	
h	=	0.64	
s	=	7.00	
i ^{1)*}	=	2°30'	
w	=		

Canon

F ^{1)*}	=	8.86	
Z ¹⁾	=	9.07	

Rayures

b	=	3.30	
N	=	6	
u	=	406.40	
Q	=	63.78	mm ²

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base

C.I.P.**350 Rem. Mag.**

TAB.

III


Date

84-06-14

Révision

02-05-15

Pays d'origine: US

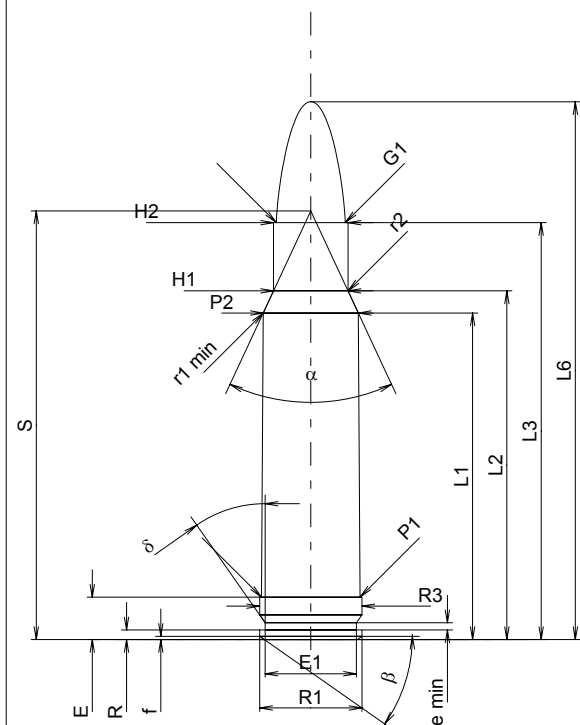**CARTOUCHE MAXI****Longueurs**

L1	=	43.18
L2	=	46.10
L3 ¹⁾	=	55.12
L4	=	
L5	=	
L6	=	71.12

Culot

R	=	1.27
R1	=	13.51
R3	=	13.51
E ¹⁾	=	5.59
E1	=	12.07
e min	=	0.94
delta	=	35°
f	=	0.41
beta	=	35°

Chambre à poudre

P1	=	13.03
P2*	=	12.58

Cône de raccordement

alpha*	=	50°
S*	=	56.67
r1 min	=	0.76
r2	=	2.54

Collet

H1*	=	9.86
H2 ¹⁾	=	9.86

Projectile

G1 ¹⁾	=	9.12
G2	=	
F	=	
L3+G ¹⁾	=	64.74

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4300 bar
PK	=	4945 bar
PE	=	5375 bar
M	=	25.00
EE	=	4620 Joule

Autres indications

Fe ¹⁾	=	0.10
delta L	=	

CHAMBRE MINI**Longueurs**

L1	=	43.39
L2	=	46.27
L3 ¹⁾	=	55.73

Cuvette

R	=	
R1	=	13.59
R2	=	
R3	=	13.59
r	=	

Chambre à poudre

E ¹⁾	=	5.59
P1 ¹⁾	=	13.06
P2*	=	12.60

Cône de raccordement

alpha*	=	50°
S*	=	56.90
r1 max	=	0.76
r2	=	2.79

Collet

H1*	=	9.91
H2 ¹⁾	=	9.88

Prise de rayures

G1 ¹⁾ *	=	9.12
G ¹⁾	=	9.62
alpha1*	=	60°
h	=	0.65
s	=	6.64
i ¹⁾ *	=	2°30'
w	=	

Canon

F ¹⁾ *	=	8.86
Z ¹⁾	=	9.07

Rayures

b	=	3.30
N	=	6
u	=	406.00
Q	=	63.78 mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base