


C.I.P.**250 Savage**

Pays d'origine: US

TAB. I

Date 84-06-14

Révision 02-05-15

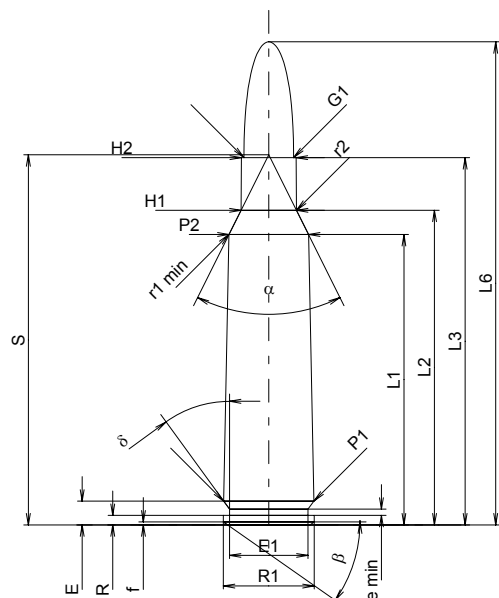**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	38.40	-0.20
L2 ¹⁾	=	41.60	-0.20
L3 ¹⁾	=	48.56	
L4	=		
L5	=		
L6	=	63.88	

Culot

R	=	1.24	
R1	=	12.01	
R3	=		
E	=	3.14	
E1	=	10.39	
e min	=	0.84	
delta	=	36°	
f	=	0.38	
beta	=	35°	

Chambre à poudre

P1	=	11.93	
P2 ^{1)*}	=	10.52	-0.20

Cône de raccordement

alpha*	=	53°	
S*	=	48.95	
r1 min	=	2.54	
r2	=	2.54	

Collet

H1*	=	7.33	
H2 ¹⁾	=	7.25	

Projectile

G1 ¹⁾	=	6.55	
G2	=		
F	=		
L3+G ¹⁾	=	51.55	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3650 bar	
PK	=	4198 bar	
PE	=	4560 bar	
M	=	25.00	
EE	=	2900 Joule	

Autres indications

Fe ¹⁾	=	0.15	
delta L	=		

CHAMBRE MINI**Longueurs**

L1	=	38.36	
L2	=	41.58	
L3 ¹⁾	=	48.82	

Cuvette

R	=		
R1	=	12.14	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.14	
P1 ¹⁾	=	12.01	
P2*	=	10.56	

Cône de raccordement

alpha ^{1)*}	=	53°	
S*	=	48.95	
r1 max	=	2.54	
r2	=	2.54	

Collet

H1*	=	7.35	
H2 ¹⁾	=	7.26	

Prise de rayures

G1 ^{1)*}	=	6.63	
G ¹⁾	=	2.99	
alpha1*	=	90°	
h	=	0.32	
s	=		
i ^{1)*}	=	3°	
w	=		

Canon

F ^{1)*}	=	6.35	
Z ¹⁾	=	6.53	

Rayures

b	=	2.24	
N	=	6	
u	=	356.00	
Q	=	32.90	mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base

C.I.P.**257 Roberts**

TAB.

I


Date

84-06-14

Pays d'origine: US

Révision

02-05-15

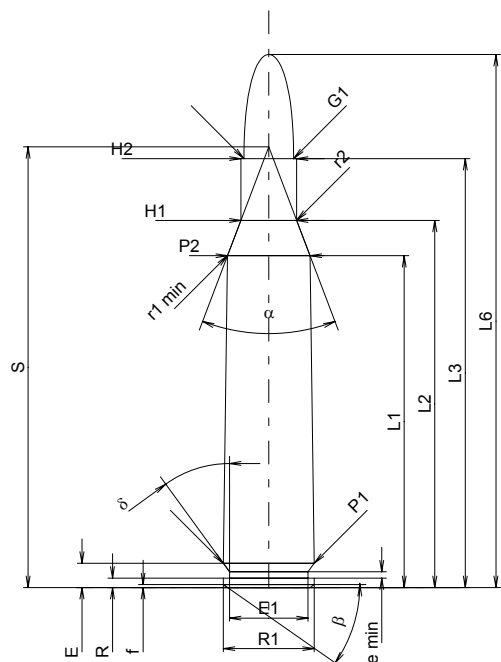**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	43.88	-0.20
L2 ¹⁾	=	48.55	-0.20
L3 ¹⁾	=	56.72	
L4	=		
L5	=		
L6	=	70.49	

Culot

R	=	1.24	
R1	=	12.01	
R3	=		
E	=	3.20	
E1	=	10.39	
e min	=	0.84	
δ	=	36°	
f	=	0.38	
β	=	35°	

Chambre à poudre

P1	=	12.02	
P2 ^{1)*}	=	10.91	-0.20

Cône de raccordement

α [*]	=	41°30'	
S [*]	=	58.28	
r1 min	=	0.76	
r2	=	2.54	

Collet

H1 [*]	=	7.37	
H2 ¹⁾	=	7.37	

Projectile

G1 ¹⁾	=	6.55	
G2	=		
F	=		
L3+G ¹⁾	=	59.85	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3550 bar	
PK	=	4083 bar	
PE	=	4440 bar	
M	=	25.00	
EE	=	2850 Joule	

Autres indications

Fe ¹⁾	=	0.15	
delta L	=	0.15	

CHAMBRE MINI**Longueurs**

L1	=	43.66	
L2	=	48.36	
L3 ¹⁾	=	57.25	

Cuvette

R	=		
R1	=	12.13	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.20	
P1 ¹⁾	=	12.04	
P2 [*]	=	10.96	

Cône de raccordement

α ^{1)*}	=	41°18'	
S [*]	=	58.20	
r1 max	=	0.76	
r2	=	3.18	

Collet

H1 [*]	=	7.42	
H2 ¹⁾	=	7.39	

Prise de rayures

G1 ^{1)*}	=	6.63	
G ¹⁾	=	3.13	
α1 [*]	=	90°	
h	=	0.38	
s	=		
i ^{1)*}	=	2°55'	
w	=		

Canon

F ^{1)*}	=	6.35	
Z ¹⁾	=	6.50	

Rayures

b	=	2.41	
N	=	6	
u	=	254.00	
Q	=	32.78	mm ²

Échelle 1:1



Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base

C.I.P.**257 Weath. Mag.**

TAB.	III
Date	84-06-14
Révision	18-10-17

Pays d'origine: US

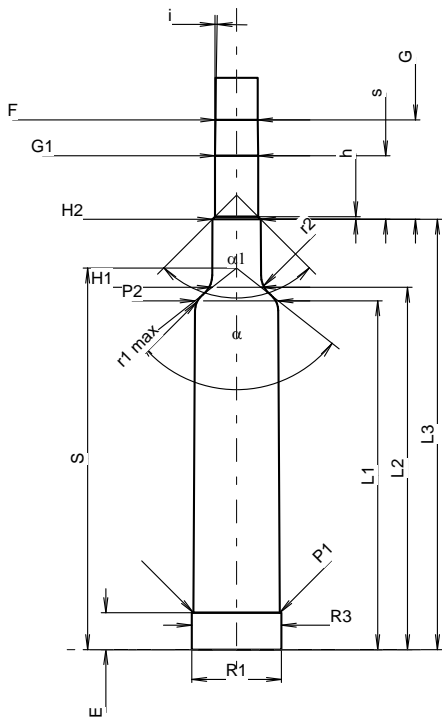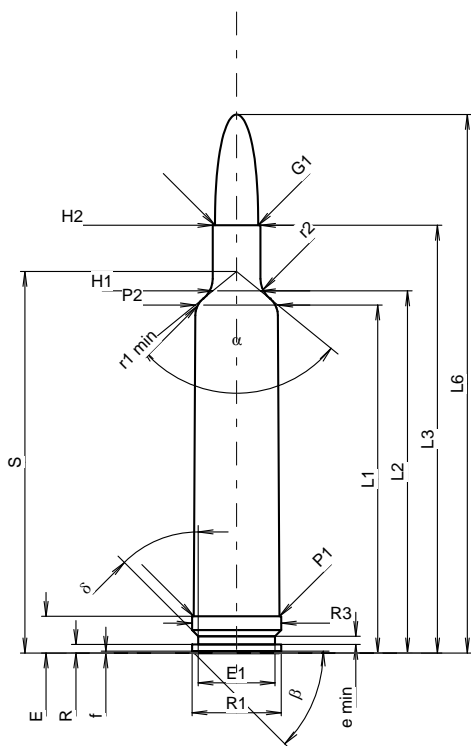

Échelle 1:1.14

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

CARTOUCHE MAXI**Longueurs**

L1	=	52.68
L2	=	54.82
L3 ¹⁾	=	64.74
L4	=	
L5	=	
L6	=	81.51

Culot

R	=	1.30
R1	=	13.50
R3	=	13.50
E ¹⁾	=	5.56
E1	=	11.61
e min	=	1.24
delta	=	45°
f	=	0.30
beta	=	45°

Chambre à poudre

P1	=	13.00
P2 *	=	12.48

Cône de raccordement

alpha *	=	101°45'19"
S *	=	57.76
r1 min	=	3.30
r2	=	3.84

Collet

H1 *	=	7.24
H2 ¹⁾	=	7.24

Projectile

G1 ¹⁾	=	6.54
G2	=	
F	=	
L3+G ¹⁾	=	79.77

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4400 bar
PK	=	5060 bar
PE	=	5500 bar
M	=	25.00
EE	=	4095 Joule

Autres indications

Fe ¹⁾	=	0.10
delta L	=	

CHAMBRE MINI**Longueurs**

L1	=	52.78
L2	=	54.83
L3 ¹⁾	=	65.13

Cuvette

R	=	
R1	=	13.56
R2	=	
R3	=	13.56
r	=	

Chambre à poudre

E ¹⁾	=	5.59
P1 ¹⁾	=	13.06
P2 *	=	12.58

Cône de raccordement

alpha *	=	103°37'21"
S *	=	57.73
r1 max	=	3.05
r2	=	3.84

Collet

H1 *	=	7.38
H2 ¹⁾	=	7.32

Prise de rayures

G1 ¹⁾ *	=	6.54
G ¹⁾	=	15.03
alpha1 *	=	90°
h	=	0.39
s	=	9.60
i ¹⁾ *	=	0°57'
w	=	

Canon

F ¹⁾ *	=	6.36
Z ¹⁾	=	6.53

Rayures

b	=	2.49
N	=	6
u	=	254.00
Q	=	33.07 mm ²

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base

C.I.P.**25-06 Rem.**

TAB.

I


Date

84-06-14

Révision

08-09-23

Pays d'origine: US

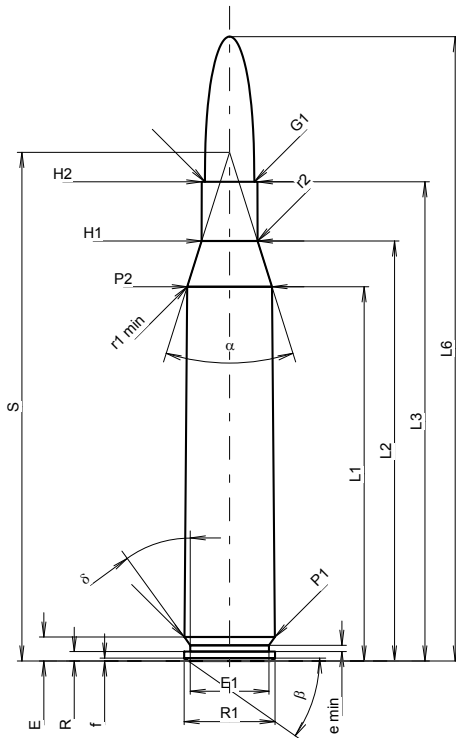**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	49.48	-0.20
L2 ¹⁾	=	55.52	-0.20
L3 ¹⁾	=	63.35	
L4	=		
L5	=		
L6	=	82.55	

Culot

R	=	1.24	
R1	=	12.01	
R3	=		
E	=	3.16	
E1	=	10.39	
e min	=	0.84	
delta	=	36°	
f	=	0.38	
beta	=	35°	

Chambre à poudre

P1	=	11.96	
P2 ¹⁾ *	=	11.20	-0.20

Cône de raccordement

alpha * ¹⁾	=	35°	
S * ¹⁾	=	67.24	
r1 min	=	1.27	
r2	=	2.54	

Collet

H1 * ¹⁾	=	7.39	
H2 ¹⁾	=	7.37	

Projectile

G1 ¹⁾	=	6.54	
G2	=		
F	=		
L3+G ¹⁾	=	68.42	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4400 bar	
PK	=	5060 bar	
PE	=	5500 bar	
M	=	25.00	
EE	=	3340 Joule	

Autres indications

Fe ¹⁾³⁾	=	0.10	
delta L	=	0.15	

CHAMBRE MINI**Longueurs**

L1	=	49.27	
L2	=	55.42	
L3 ¹⁾	=	63.55	

Cuvette

R	=		
R1	=	12.04	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.16	
P1 ¹⁾	=	11.99	
P2 * ¹⁾	=	11.24	

Cône de raccordement

alpha ^{1)*)}	=	34°30'	
S * ¹⁾	=	67.37	
r1 max	=	1.27	
r2	=	3.05	

Collet

H1 * ¹⁾	=	7.42	
H2 ¹⁾	=	7.39	

Prise de rayures


G1 ^{1)*)}	=	6.54	
G ¹⁾	=	5.07	
alpha ^{1)*)}	=	71°25'48"	
h	=	0.59	
s	=	3.26	
i ^{1)*)}	=	3°	
w	=		

Canon

F ^{1)*)}	=	6.35	
Z ¹⁾	=	6.53	

Rayures

b	=	2.44	
N	=	6	
u	=	254.00	
Q	=	33.02	mm ²

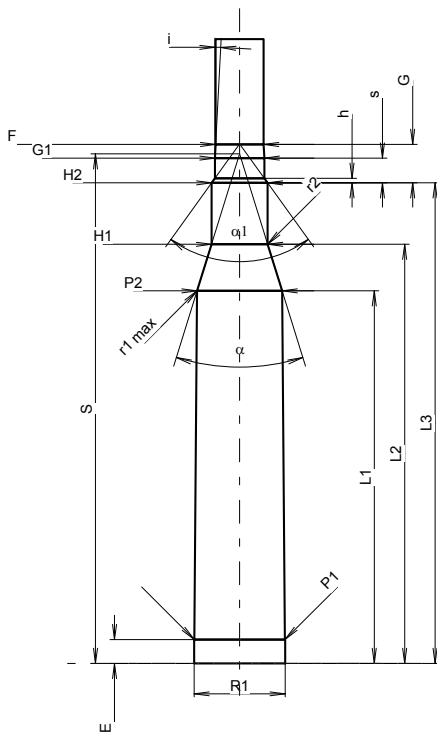

Échelle 1.0:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
3) Feuillure sur la cone de raccordement
* Dimensions de base