

C.I.P.**300 Win. Mag.**

TAB.

III

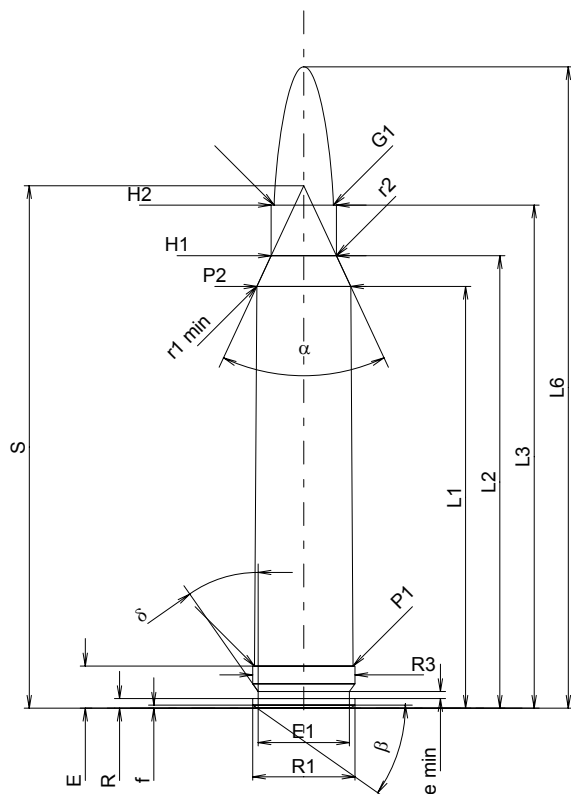
Date

84-06-14

Pays d'origine: US

Révision

02-05-15

**CARTOUCHE MAXI****Longueurs**

L1	=	55.78
L2	=	59.85
L3 ¹⁾	=	66.55
L4	=	
L5	=	
L6	=	84.84

Culot

R	=	1.27
R1	=	13.51
R3	=	13.51
E ¹⁾	=	5.59
E1	=	12.07
e min	=	0.94
delta	=	35°
f	=	0.41
beta	=	35°

Chambre à poudre

P1	=	13.03
P2*	=	12.42

Cône de raccordement

alpha*	=	50°
S*	=	69.10
r1 min	=	1.02
r2	=	2.54

Collet

H1*	=	8.63
H2 ¹⁾	=	8.63

Projectile

G1 ¹⁾	=	7.85
G2	=	
F	=	
L3+G ¹⁾	=	74.41

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4300 bar
PK	=	4945 bar
PE	=	5375 bar
M	=	25.00
EE	=	4935 Joule

Autres indications

Fe ¹⁾	=	0.10
delta L	=	

CHAMBRE MINI**Longueurs**

L1	=	55.98
L2	=	60.01
L3 ¹⁾	=	67.16

Cuvette

R	=	1.27
R1	=	13.59
R2	=	
R3	=	13.59
r	=	

Chambre à poudre

E ¹⁾	=	5.59
P1 ¹⁾	=	13.06
P2*	=	12.45

Cône de raccordement

alpha*	=	50°
S*	=	69.33
r1 max	=	0.76
r2	=	3.18

Collet

H1*	=	8.69
H2 ¹⁾	=	8.65

Prise de rayures

G1 ¹⁾ *	=	8.00
G ¹⁾	=	7.86
alpha1*	=	90°
h	=	0.33
s	=	
i ¹⁾ *	=	1°26'37"
w	=	

Canon

F ¹⁾ *	=	7.62
Z ¹⁾	=	7.82

Rayures

b	=	2.79
N	=	6
u	=	254.00
Q	=	47.32 mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base