


C.I.P.**30 R Blaser**

TAB. II

Date 91-02-19

Pays d'origine: DE

Révision 07-07-06

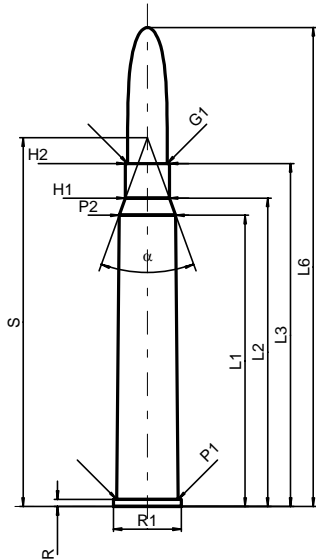**CARTOUCHE MAXI****Longueurs**

| | | |
|------------------|---|-------|
| L1 * | = | 57.77 |
| L2 * | = | 61.16 |
| L3 ¹⁾ | = | 68.00 |
| L4 | = | |
| L5 | = | |
| L6 | = | 95.00 |

Culot

| | | | |
|-----------------|---|-------|-------|
| R ¹⁾ | = | 1.40 | -0.25 |
| R1 | = | 13.50 | |
| R3 | = | | |
| E | = | | |
| E1 | = | | |
| e min | = | | |
| delta | = | | |
| f | = | | |
| beta | = | | |

Chambre à poudre

| | | |
|------|---|-------|
| P1 | = | 12.20 |
| P2 * | = | 11.20 |

Cône de raccordement

| | | |
|--------|---|-----------|
| alpha | = | 40°02'02" |
| S | = | 73.14 |
| r1 min | = | |
| r2 | = | |

Collet

| | | |
|------------------|---|------|
| H1 * | = | 8.73 |
| H2 ¹⁾ | = | 8.73 |

Projectile

| | | |
|--------------------|---|-------|
| G1 ¹⁾ | = | 7.85 |
| G2 | = | |
| F | = | |
| L3+G ¹⁾ | = | 76.39 |

Pressions (Énergies)**Méthode transducteur**

| | | |
|------|---|------------|
| Pmax | = | 4050 bar |
| PK | = | 4658 bar |
| PE | = | 5060 bar |
| M | = | 25.00 |
| EE | = | 4500 Joule |

Autres indications

| | | |
|------------------|---|------|
| Fe ¹⁾ | = | 0.10 |
| delta L | = | |

CHAMBRE MINI**Longueurs**

| | | |
|------------------|---|-------|
| L1 * | = | 57.78 |
| L2 * | = | 61.13 |
| L3 ¹⁾ | = | 68.30 |

Cuvette

| | | |
|-----------------|---|-------|
| R ¹⁾ | = | 1.40 |
| R1 | = | 13.55 |
| R2 | = | |
| R3 | = | |
| r | = | |

Chambre à poudre

| | | |
|------------------|---|-------|
| E | = | 1.40 |
| P1 ¹⁾ | = | 12.23 |
| P2 * | = | 11.23 |

Cône de raccordement

| | | |
|--------|---|-----------|
| alpha | = | 40°01'16" |
| S | = | 73.20 |
| r1 max | = | |
| r2 | = | |

Collet

| | | |
|------------------|---|------|
| H1 * | = | 8.79 |
| H2 ¹⁾ | = | 8.76 |

Prise de rayures


| | | |
|--------------------|---|-------|
| G1 ¹⁾ * | = | 7.85 |
| G ¹⁾ * | = | 8.39 |
| alpha1 | = | 90° |
| h | = | 0.46 |
| s * | = | 4.00 |
| i ¹⁾ | = | 1°30' |
| w | = | |

Canon

| | | |
|-------------------|---|------|
| F ¹⁾ * | = | 7.62 |
| Z ¹⁾ | = | 7.82 |

Rayures

| | | |
|---|---|-----------------------|
| b | = | 4.47 |
| N | = | 4 |
| u | = | 305.00 |
| Q | = | 47.51 mm ² |

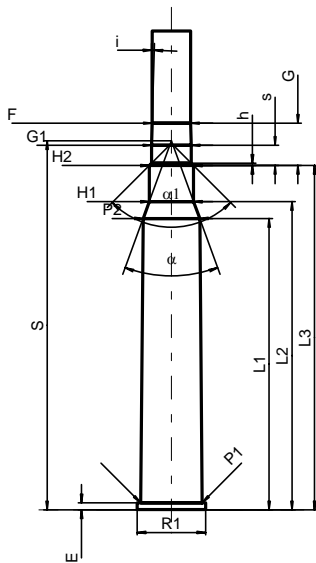

Échelle 1:1.5

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A contrôler pour la sécurité
* Dimensions de base