
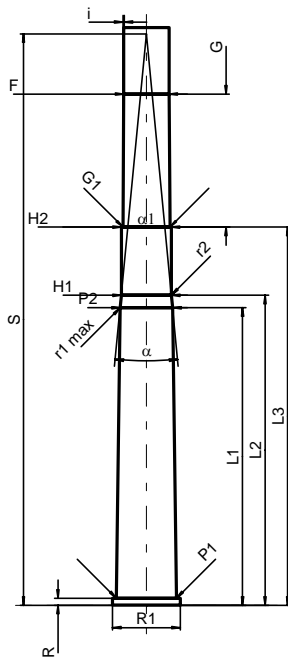


C.I.P.**9,3 x 74 R**

Pays d'origine: DE

TAB.	II
Date	84-06-14
Révision	06-05-16

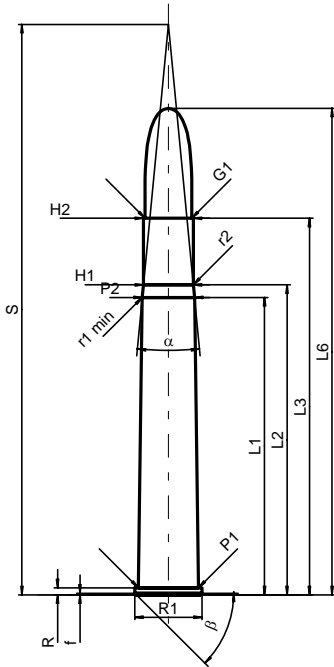

Échelle 1:1.5

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

CARTOUCHE MAXI**Longueurs**

L1 *	=	59.00
L2 *	=	61.50
L3 ¹⁾	=	74.70
L4	=	
L5	=	
L6	=	96.50

Culot

R ¹⁾	=	1.40	-0.25
R1	=	13.35	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	45°	

Chambre à poudre

P1	=	11.90
P2 *	=	10.40

Cône de raccordement

alpha	=	10°58'
S	=	113.17
r1 min	=	0.50
r2	=	0.50

Collet

H1 *	=	9.92
H2 ¹⁾	=	9.92

Projectile

G1 ¹⁾	=	9.30
G2	=	
F	=	
L3+G ¹⁾	=	101.10

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3400 bar
PK	=	3910 bar
PE	=	4250 bar
M	=	25.00
EE	=	5045 Joule

Autres indications

Fe ¹⁾	=	0.15
delta L	=	

CHAMBRE MINI**Longueurs**

L1 *	=	59.00
L2 *	=	61.50
L3 ¹⁾	=	75.00

Cuvette

R ¹⁾	=	1.40
R1	=	13.40
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	11.93
P2 *	=	10.43

Cône de raccordement

alpha	=	10°58'
S	=	113.33
r1 max	=	0.50
r2	=	0.50

Collet

H1 *	=	9.95
H2 ¹⁾	=	9.94

Prise de rayures

G1 ^{1)*}	=	9.33
G ^{1)*}	=	26.40
alpha1	=	180°
h	=	
s	=	
i ¹⁾	=	0°21'29"
w	=	

Canon

F ^{1)*}	=	9.00
Z ¹⁾	=	9.28

Rayures

b	=	4.60
N	=	4
u	=	360.00
Q	=	66.32 mm ²

Notes: 1) A contrôler pour la sécurité
* Dimensions de base